




OMEGA OMEGA series

Low profile scissor lift




3000 KG

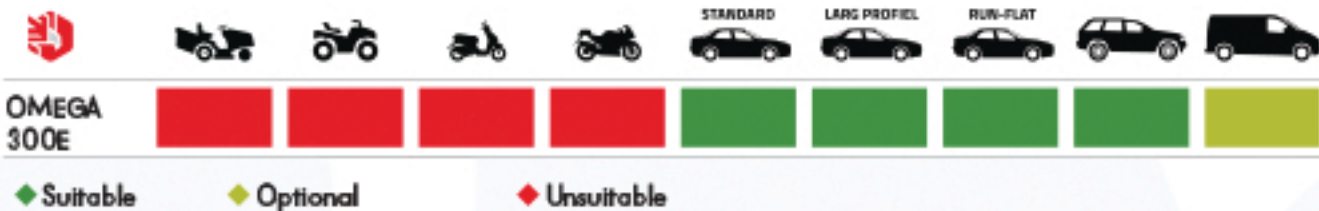


BRIGHT OMEGA 300E

Line Drawing

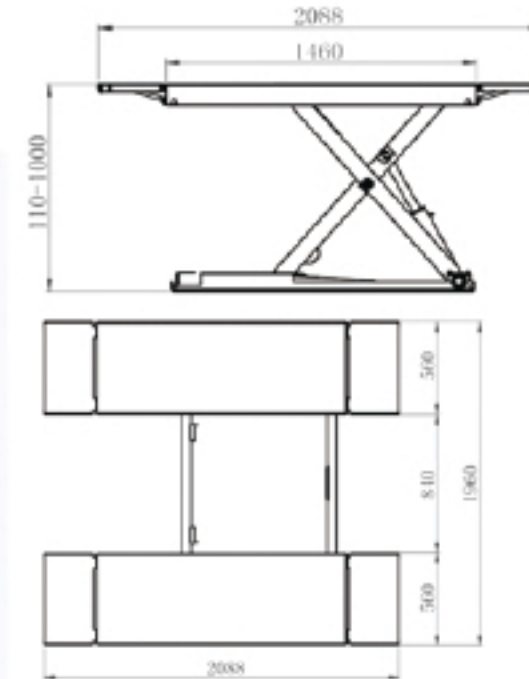

Foundation drawing

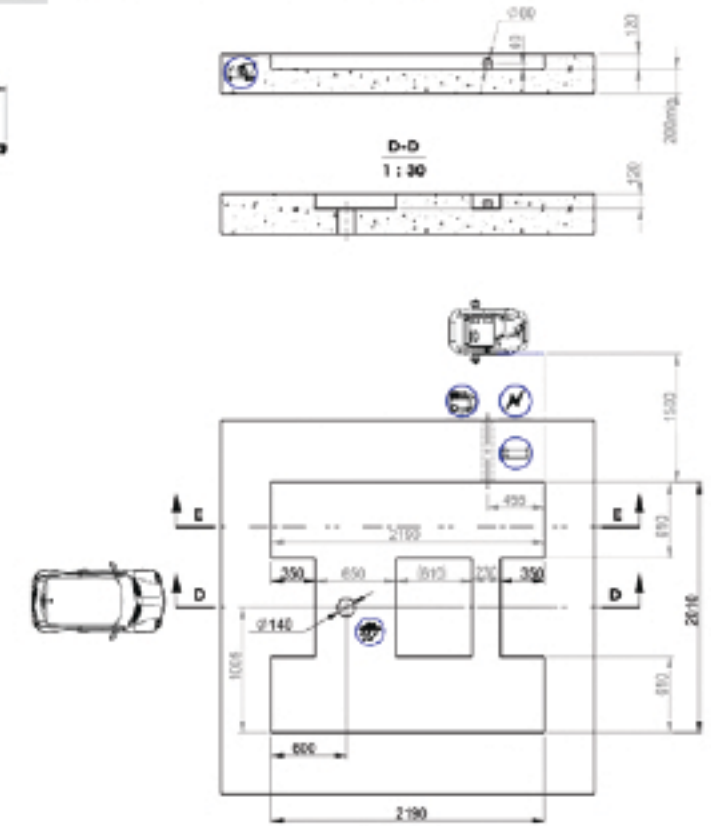

Product feature

- Double cylinder drive, mechanical synchronization structure, to ensure platform synchronization
- Equipped with double mechanical safety lock to ensure that the lift at different heights can be effectively locked
- Pneumatic unlocking mode, convenient and durable
- Optional labor saving movable mechanism design, easy to move
- Bright lift are covered by worldwide product liability insurance
- The 1960MM widened platform is suitable for more models
- The extension can support the platform, suitable for longer wheelbase models
- Strengthen the arm design, lift more stable
- All connecting shafts are equipped with oil filling holes to ensure lubrication in operation
- The cylinder is supplied with oil return tube to prevent corrosion of the cylinder
- Anti-rollover function is standard, effectively prevent lifting machine rollover
- Optional anti-pressure foot guardrail
- 24V safe control to ensure safe use

Technical data

Lifting capacity	3000kg
Total platform width	1960mm
Lifting time	40s
Motor power	2.2kw
Lifting height	1000mm
Power requirements	220V/380V
Minimum height	110mm
Gross weight	619kg
Platform length	1460mm
Platform width	560mm
Package size	2060*1580*220mm
Accessory size	530*430*1150mm

