

# M39 ATV



## Semi-automatic motorcycle line tyre changers.

**Proven and reliable** semi-automatic swing arm configuration and manual locking system of the vertical working arm.

**Self-centering turntable** capacity from **5"** to **23"** performing **3 different clamping positions** easily selectable without tools.


Horizontal bead breaking system.

Bead breaker wheel support movable in **3 different positions** having maximum capacity of **370 mm (14,5")** to handle particularly high-profile tyres such as **ATV** tyres.







**Suitable for professional and intensive use on motorcycle, scooter, go-kart and garden equipment wheels (TURF), as well as also on very thick wheels such as quad wheels.**

## INCLUDED ACCESSORIES

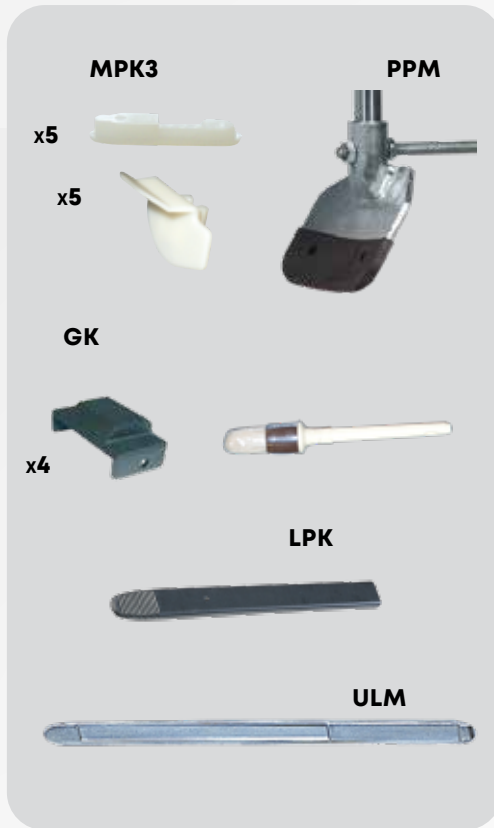

## RECOMMENDED ACCESSORIES

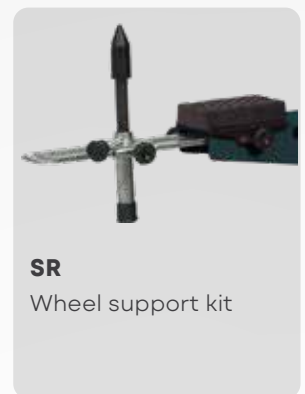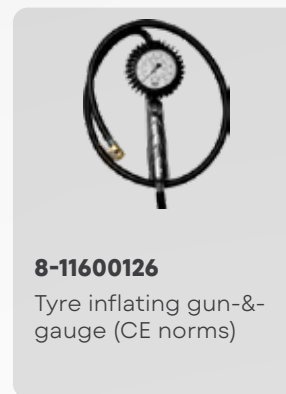

For other optional accessories, refer to separate catalogue.

## TECHNICAL DATA

|   |          |  |
|---|----------|--|
| Clamping capacity                             | Standard | 5" ÷ 23"                                       |
|   | Kit ATV  | 6" ÷ 16"                                       |
| Bead breaker blade force                      |          | 750 kg   |
| Max. wheel diameter                           |          | 1000 mm  |
| Maximum wheel width with bead breaker support | Pos. 1   | 190 mm - 7,5"                                  |
|   | Pos. 2   | 280 mm - 11"                                   |
|   | Pos. 3   | 370 mm - 14,5"                                 |
| Turntable rotation                            |          | 8 ÷ 15 rpm                                     |
| Operating pressure                            |          | 8 - 10 bar (116-145 psi)                       |
| Power supply                                  |          | 230-400V / 3Ph / 0,55kW<br>230V / 1Ph / 0,75kW |
| Weight  |          | 150 kg   |