

**VOLKSWAGEN
GROUP**

Product Catalogue

Products approved by Volkswagen



Inground lifts | Surface-mounted lifts



Sololift 1.35 Saa VW

Electro-hydraulic centre-ram lift 3.5 t, superstructure with arms



VAS 781 005A I ASE78100581000:
20012128-1 & 20012128-2

Order no.	Item no.	#	Part of the approval according to order no. 20012128-1/-2:
20012128-1	21215	1	Superstructure 1.35 Saa Ø50 mm
	12560	1	VW specification VAS 781 005A
	38824	1	Swivel arm hook 1100 lg
	11103	1	Document holder
	16010	4	Lifting pad extension 50 mm - Ø50 mm 1 pc.
20012128-2	10306	1	Hydraulic unit SL 1.35 with integrated pump unit, stroke 1910 mm for cylinder Ø213 mm
	11063	1	Set of cables 10 m
	12034	1	Ecological hydraulic fluid 14 ltr.

The double telescopic swivel arms convince with a **very low minimum height** which even makes it possible to lift low-profile sports cars without any problems.

The **internal arm locking system** installed as standard reliably protects against external influences.

The **strong 213 mm cylinder** is designed for long-lasting functionality and further rounds off the high-quality level, which ensures **low maintenance requirements**.

Even in the event of a power blackout, the lift can still be lowered without any problem thanks to the pneumatic emergency lowering system.

The Sololift 1.35 Saa is perfectly completed by a **control system that is both visually and technically convincing**.

Standard colour:

RAL 7012

Options:

Large program of extra pads depending on type of vehicle

Installation variants:

Superstructure on floor
with hydraulic pump unit in floor


Not included in the scope of approval, please order separately:

Steel cassette:

Self supporting

Standard: painted

Optional: hot-dip galvanized or plastic-coated

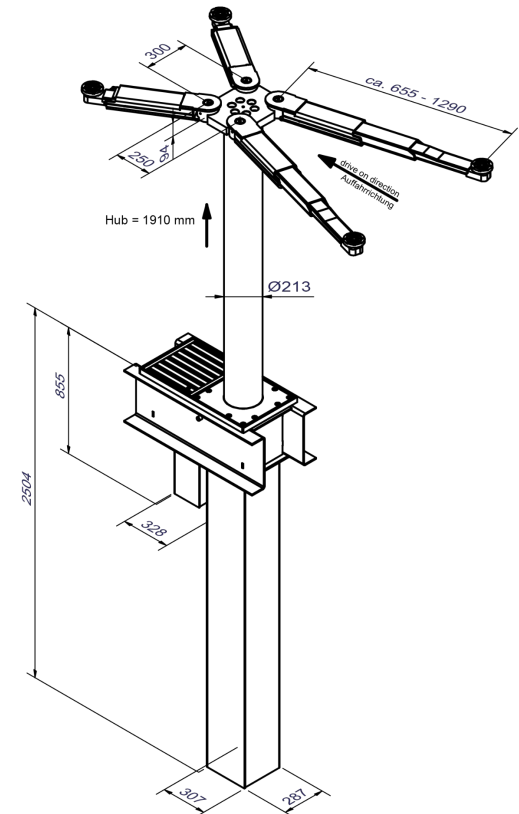



Sololift 1.35 Pv VW

Electro-hydraulic centre-ram lift 3.5 t with flat lifting support



VAS 781 007 | ASE78100780000:
20012118

Order no.	Item.	#	Part of the approval according to order no. 20012118:
20012118	21518	1	Superstructure 1.35 Pv 160-220 Ø213
	12458	1	VW specification VAS 781 007
	10306	1	Hydraulic unit SL 1.35 with integrated pump unit, stroke 1910 mm , cylinder Ø 213mm
	11063	1	Set of cables 10 m
	11060	1	Surcharge for 1 set xy-heads
	12034	1	Ecological hydraulic fluid 14 ltr.

The Sololift 1.35 Pv is ideal for **quick and convenient vehicle pick-up**.

The premium flat lifting support made of very strong and rigid solid material, which ensures a **high degree of stability**. It is zinc sprayed and painted. This not only looks good, it also works well!

The **handy, non-slip and form-fitting rubber pads** ensure that the vehicle is lifted precisely.

The **strong cylinder** with a diameter of 213 mm is also designed for long-lasting functionality and further rounds off the high-quality level, which ensures **low maintenance requirements**.

Even in the event of a power blackout, the lift can still be lowered without difficulty thanks to the pneumatic emergency lowering device.

Sololift 1.35 Pv is perfectly completed by a **control system that is both visually and technically convincing**.

Standard colour:

RAL 7012

Optionen:

Rubber pads in different heights

Installation variants:

Superstructure on floor
with hydraulic pump unit in floor


Not included in the scope of approval, please order separately:

Steel cassette:

Self supporting

Standard: painted

Optional: hot-dip galvanized or plastic-coated

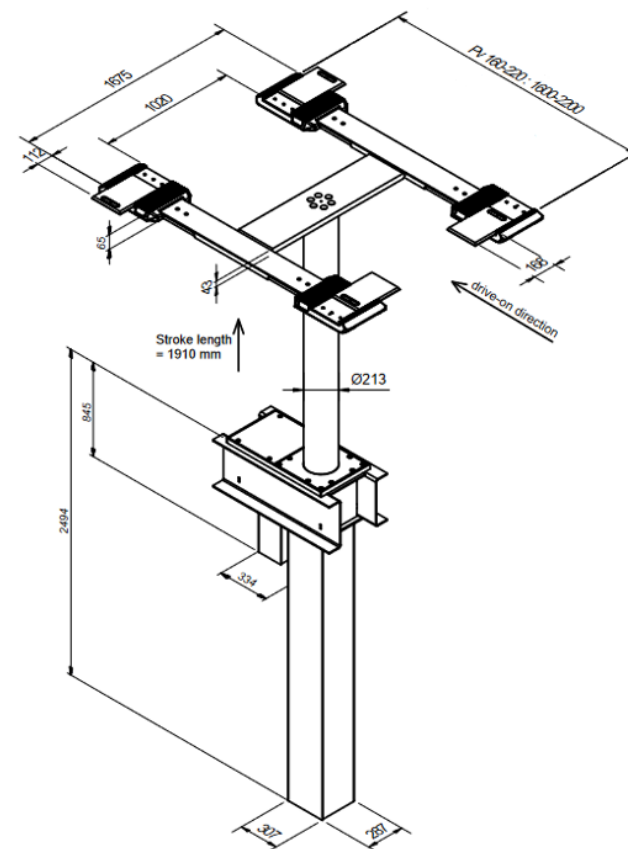



Sololift 1.35 Fv Uni VW

Electro-hydraulic centre-ram lift 3.5 t, superstructure with lifting blades



VAS 781 009 | ASE78100980000:
20012119-1 & 20012119-2

Order no.	Item no.	#	Part of the approval according to order no. 20012119-1/-2:
20012119-1	21514	1	Superstructure 1.35 Fv Uni Ø213
20012119-2	10305	1	Hydraulic unit S1.35Ø213-1910-D-A-wall aggregate
	12034	1	Ecological hydraulic fluid 14 ltr.

The **Sololift 1.35 Fv Uni** impresses with **easy handling** when lifting vehicles. **Various wheelbases** can be lifted with the **adjustable steel blades** located on the sides of the superstructure. This leaves the **underbody sills free**, unlike with a platform lift.

The **strong cylinder** with a diameter of 213 mm is also designed for long-lasting functionality and further rounds off the high-quality level, which ensures **low maintenance requirements**.

Even in the event of a power failure, the lift can be lowered without difficulty thanks to the pneumatic emergency lowering device.


Sololift 1.35 Fv Uni is perfectly completed by a **control system that is both visually and technically convincing**

Standard colour:
galvanized

Installation variants:
Superstructure on floor
with hydraulic pump unit in floor

Not included in the scope of approval, please order separately:

Steel cassette:
Self supporting
Standard: painted
Optional: hot-dip galvanized or plastic-coated

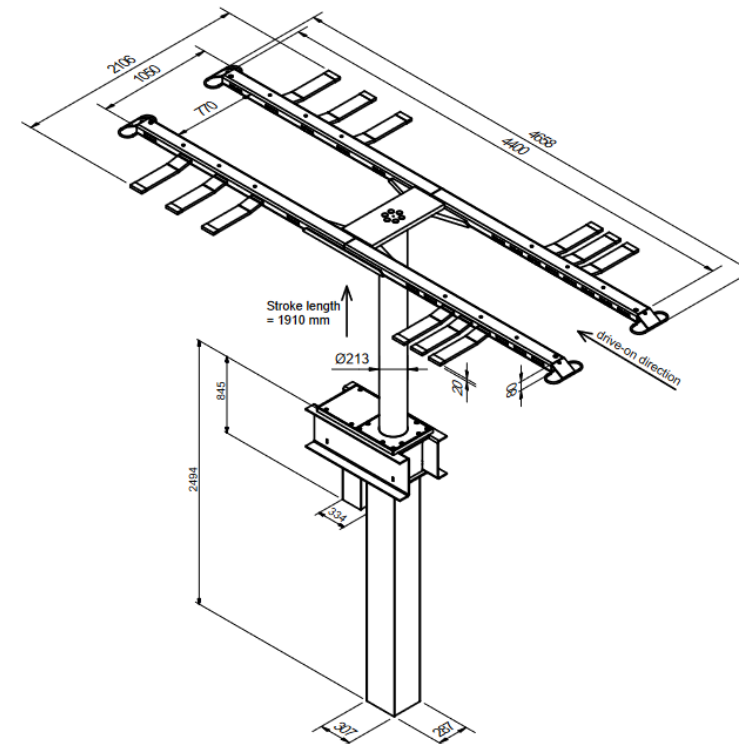



Masterlift 2.35 NxT Pv 160-220 xy VW

Electro-hydraulic twin-ram lift 3.5 t with repair platform



**VAS 5246A I ASE45504501000:
20012129**

Order no.	Item no.	#	Part of the approval according to order no. 20012129:
20012129	14107	1	Repair platform 2.35 Pv 160-220 – solid steel, zinc-coated and painted RAL 9006, with aluminium mounting plates incl. xy plates
	14050	1	Hydraulic unit ML 2.35 NxT, Ø140 mm, PD 1550, stroke 1915 mm, with aluminium cover and 1 set of piston support floor plates
	12561	1	VW specification VAS 5246A
	11063	1	Set of cables 10 m
	12033	1	Ecological hydraulic fluid 10 ltr
	11104	1	Set of 2 magnetic tool trays
	11103	1	Document holder

The Masterlift 2.35 NxT Pv is optimally suited for **quick and easy vehicle lifting**.

The premium repair platforms are constructed of very strong and rigid solid steel that offers a **high degree of stability**. They are zinc-coated and painted. Looks great and works great!

The repair platforms, which come with **xy-function in the premium version as standard**, make the Masterlift 2.35 NxT the perfect helper in your workshop. Optionally, longitudinally adjustable supports can be supplied instead of the xy function.

The handy, **non-slip and form-fitting rubber pads** ensure that the vehicle is lifted with pinpoint accuracy.

The **strong 140 mm diameter cylinders** are designed for long-lasting functionality and further round off the high-quality level, which ensures **low maintenance requirements**.

Even in the event of a power blackout, the lift can still be lowered without any problem thanks to the pneumatic emergency lowering system.

The Masterlift 2.35 NxT Pv is perfectly completed by a **control system that is both visually and technically convincing**.

Standard colours:

Pv Premium: zinc coated and painted - RAL 9006

Options:

Rubber blocks in different heights

Installation variants:

On-floor installation

Ceiling installation

Optionally available:

Self-supporting installation, without load on the bottom of the sub-casing

Not included in the scope of approval, please order separately:

Frame:


Standard: completely hot-dip galvanized

Sub-casing:

Standard: painted

Optional: hot-dip galvanized or plastic-coated

Can be adapted to existing cassettes.

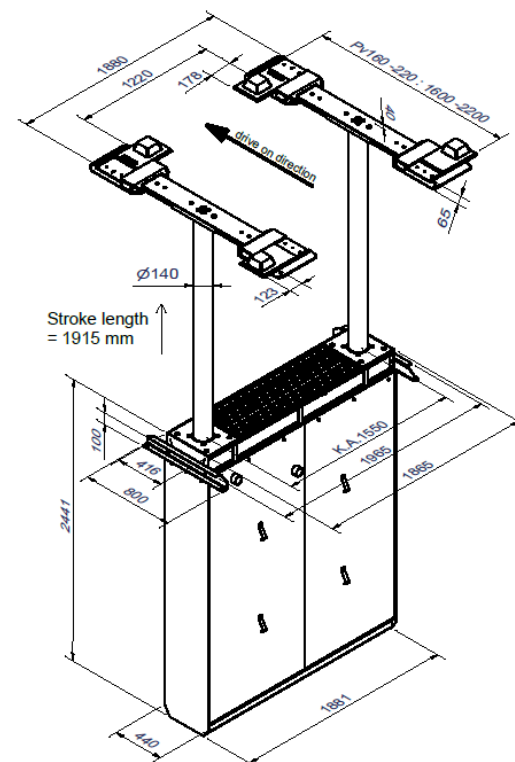



Masterlift 2.35 NxT Saa 260 VW

Electro-hydraulic twin-ram lift 3.5 t with swivel arm superstructure



VAS 782 003A | ASE78200381000:
20012130-1 & 20012130-2

Order no.	Item no.	#	Part of the approval according to order no. 20012130-1/-2:
20012130-1	21214	1	Swivel arm superstructure 2.35 Saa 260 Universal, double telescopic lifting pads 16007 Ø50mm, pick-up height min. 95 mm / max. 174 mm
	12562	1	VW specification VAS 782 003A
	11103	1	Document holder
	11104	1	Set of 2 magnetic tool trays
	16010	4	Lifting pad extensions 50 mm - Ø50 mm 1 pc.
20012130-2	14051	1	Hydraulic unit ML 2.35 NxT, Ø140 mm, PD 2600, stroke 1915 mm, with aluminium cover and 1 set of piston support floor plates
	11063	1	Set of cables 10 m
	12033	1	Ecological hydraulic fluid 10 ltr

The double telescopic swivel arms convince with a **very low minimum height**, which even makes it possible to lift low-profile sports cars without any problems.

Tyres and rims are protected in the best possible way by the rounded design of the superstructure's chassis. The **internal arm locking system** installed as standard reliably protects against external influences.

The **strong 140 mm diameter cylinders** are designed for long-lasting functionality and further round off the high quality level, which ensures **low maintenance requirements**. Even in the event of a power blackout, the lift can still be lowered without any problem thanks to the pneumatic emergency lowering system.

The Masterlift 2.35 NxT Saa is perfectly completed by a **control system that is both visually and technically convincing**.

Standard colours:

Base plate: RAL 7012

Arms: RAL 7012

Options:

Wide range of extra pads, depending on vehicle type

Installation variants:

On-floor installation

Ceiling installation

Optionally available:

Self-supporting installation, without load on the bottom of the sub-casing

Not included in the scope of approval, please order separately:

Frame:


Standard: completely hot-dip galvanized

Sub-casing:

Standard: painted

Optional: hot-dip galvanized or plastic-coated

Can be adapted to existing cassettes.

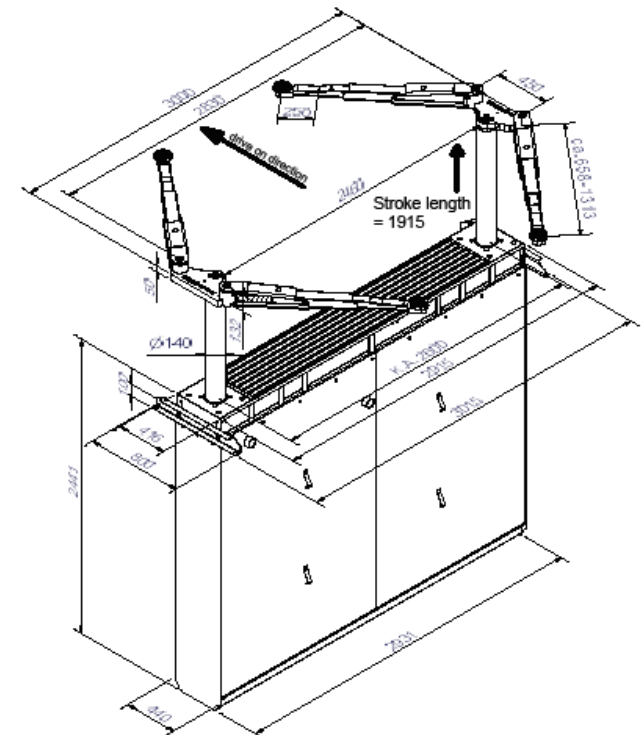




Masterlift 2.35 Combi Check-in PD 1335 VW

Electro-hydraulic 2xtwin-ram lift 3.5 t with platforms and free-wheel lift with flat lifting supports



VAS 6858 | ASE45514000000:
20012101-1 & 20012101-2

Order no.	Item no.	#	Part of the approval according to order no. 20012101-1/-2:
20012101-1	21425	1	Platform superstructure ML 2.35 F 440 Combi Check-in - PD 1335, incl. lighting
	12464	1	VW specifications VAS 6858
	21064	1	Ramp "Combi CH" cpl.
	20734	1	Superstructure 2.35 Pv 160-220XY
20012101-2	10242	1	Hydraulic unit ZW ML 2.35 Combi Check-In
	12036	1	Ecological hydraulic fluid 17ltr.

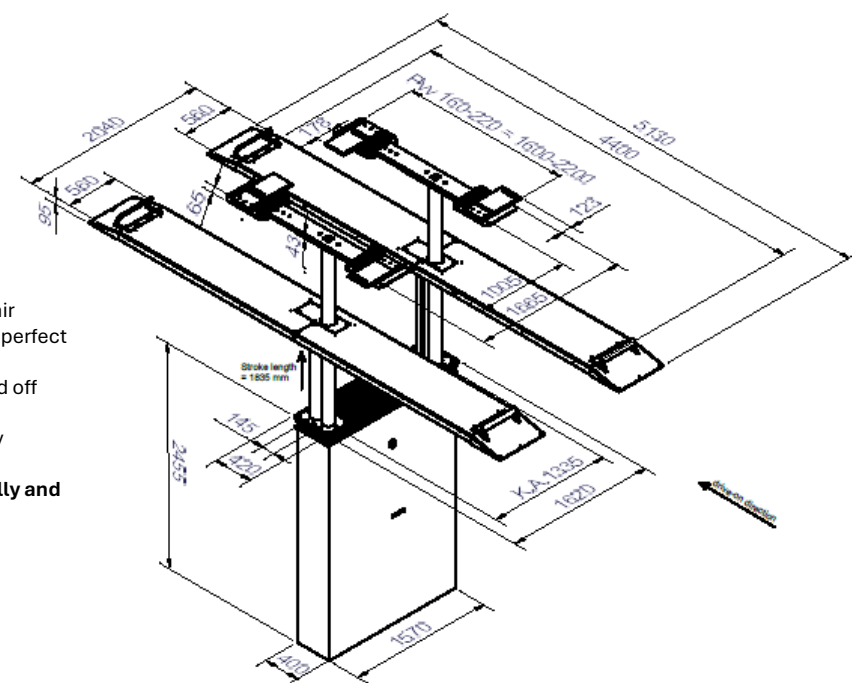

The Masterlift 2.35 Combi Check-in PD 1335 is ideal for **quick and convenient vehicle lifting**.

The platforms are made of very strong and rigid material, which ensures a **high degree of stability**. The repair platforms, which come with xy-function as standard, make the Masterlift 2.35 Combi Check-in PD 1335 the perfect helper in your workshop.

Four strong cylinders with a diameter of 123 mm are designed for long-lasting functionality and further round off the high-quality level, which ensures **low maintenance requirements**.

Even in the event of a power blackout, the lift can still be easily lowered thanks to the pneumatic emergency lowering device.

The Masterlift 2.35 Combi Check-in PD 1335 is perfectly completed by a **control system that is both visually and technically convincing**.

Standard colours:

Platforms: RAL 7012

Aluminium coating with integrated LED lighting

Pv Premium: zinc coated and painted in RAL 7012

Options:

Set of rubber blocks 40, 60, 80 and 100 mm

Installation variants:

On-floor installation

Recessed installation

Not included in the scope of approval, please order separately:

Steel cassette:

Standard: painted

Optional: hot-dip galvanized or plastic coated




Electro-hydraulic 2xtwin-ram lift 3.5 t with platforms and free-wheel lift with flat lifting supports



Order no.	Item no.	#	Part of the approval according to order no. 20012131-1/-2:
20012131-1	21500	1	Platform superstructure 2.35 F 440 Combi Check-in, on-floor, with ramps and integrated automatically rising stoppers in front and rear, incl. LED lighting
	12563	1	Pyramid shape rubber blocks h = 40 mm, bottom 120x120 mm, top Ø100 mm, 1 set = 4 pieces
	11103	1	VW specifications VAS 782 019A
	11104	1	Document holder
	21080	1	Set of 2 magnetic tool trays
	21096	1	Power distribution for 1 platform (Schuko plug 230 V / 16 A / IP54)
20012131-2	10290	1	Pneumatic installation for 1 platform (1 T-piece each front and back)
	21504	1	Hydraulic unit ML 2.35 Combi Check-in, PD 1550, stroke 1900 mm
	11071	1	Repair platform superstructure 2.35 Pv 160 - 220 xy, solid steel, zinc coated and hammer painted, RAL 9006, for Combi Lift
	12036	1	Set of cables JE 10 m
	11102	1	Ecological hydraulic fluid 17 ltr.

Standard: painted
Optional: hot-dip galvanized or plastic coated

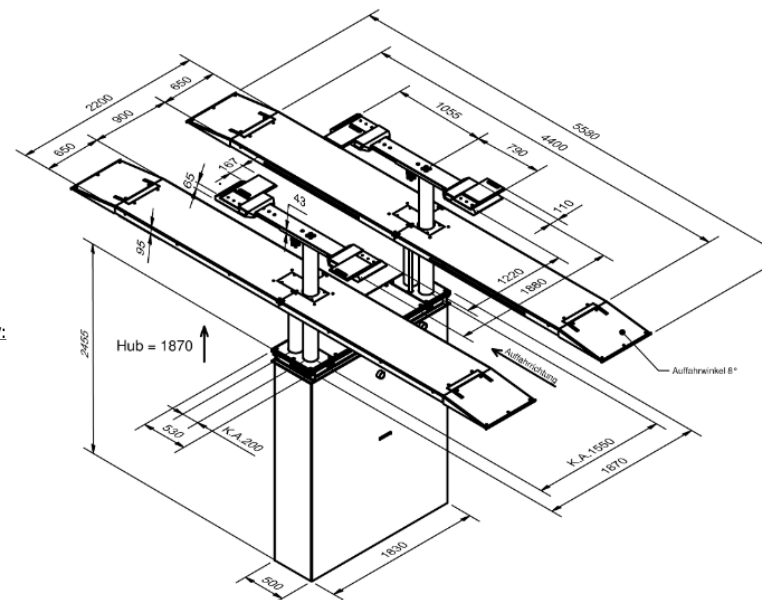



Biglift 2.55 Saa 230 VW

Electro-hydraulic twin-ram lift 5.5 t with swivel arm superstructure



VAS 782 035A | ASE78203581000:
20012132-1 & 20012132-2

Order no.	Item no.	#	Part of the approval according to order no. 20012132-1/-2:
20012132-1	21202	1	Superstructure 2.55 Saa 230 Ø 213, incl. lifting pad 11028 (135 - 195 mm), Ø 50 mm
	12564	1	VW specification VAS 782035A
	11103	1	Document holder
	11104	1	Set of 2 magnetic tool trays
	16010	4	Lifting pad extension 50 mm – Ø50 mm 1 pc.
20012132-2	11063	1	Set of cables 10 m
	10308	1	Hydraulic unit BL PD 2150 mm, stroke 1860 mm, cylinder Ø 213 mm
	12036	1	Ecological hydraulic fluid 17 ltr

The double telescopic swivel arms convince with an **unconventional lifting area**, especially suited for utility vehicles and large passenger cars.

The **internal arm locking system** installed as standard reliably protects against external influences.

The **strong 213 mm diameter cylinders** are also designed for long-lasting functionality and further round off the high quality level which ensures **low maintenance requirements**.
Even in the event of a power blackout the lift can still be lowered without any problems thanks to the pneumatic emergency lowering system.

The Biglift 2.55 Saa 230 is perfectly completed by a **control system that is both visually and technically convincing**.


Standard colour:
RAL 7012

Options:
Wide range of extra pads, depending on vehicle type

Installation variants:
Superstructure on floor
Ceiling installation

Not included in the scope of approval, please order separately:

Steel cassette:
Standard: painted
Optional: hot-dip galvanized, plastic coated

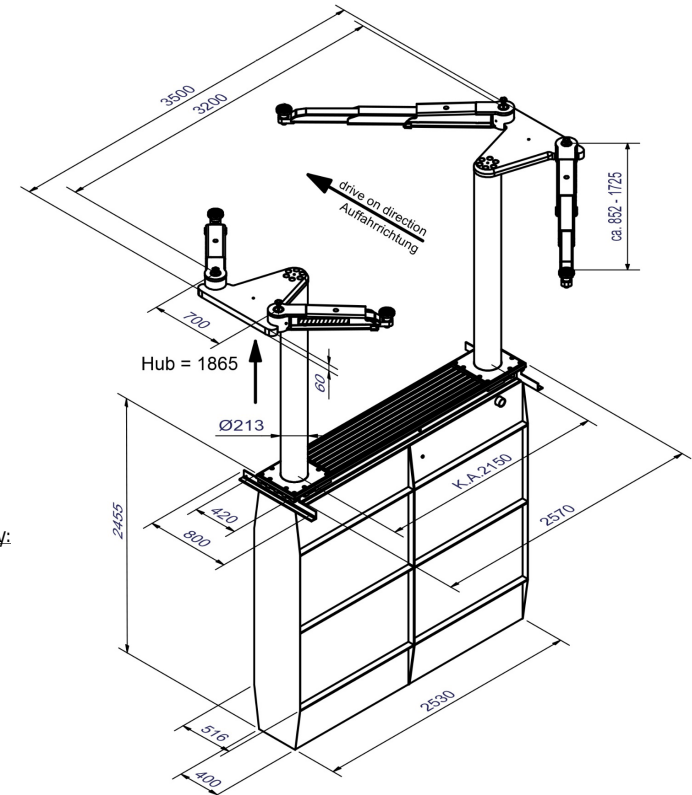



Biglift 2.55 Saa 265 VW

Electro-hydraulic twin-ram lift 5.5 t with swivel arm superstructure



VAS 782 037A | ASE78203781000:
20012133-1 & 20012133-2

Order no.	Item no.	#	Part of the approval according to order no. 20012133-1/-2:
20012133-1	21203	1	Superstructure 2.55 Saa 265 Ø213, incl. 4 single telescopic lifting pads 16008, Ø 50mm
	12565	1	VW specification VAS 782037A
	11103	1	Document holder
	11104	1	Set of 2 magnetic tool trays
	16010	4	Lifting pad extension 50 mm – Ø50 mm 1 pc.
20012133-2	11063	1	Set of cables 10 m
	10309	1	Hydraulic unit BL PD 2650 mm, stroke 1860 mm, cyl. Ø 213 mm
	12036	1	Ecological hydraulic fluid 17 ltr.

The double telescopic swivel arms convince with an **unconventional lifting area**, especially suited for utility vehicles and large passenger cars.

The **internal arm locking system** installed as standard reliably protects against external influences. An integrated mechanical safety ratchet offers additional safety for all working procedures.

The **strong 213 mm diameter cylinders** are also designed for long-lasting functionality and further round off high quality level which ensures **low maintenance requirements**.

Even in the event of a power blackout the lift can still be lowered without any problems thanks to the pneumatic emergency lowering system.

The Biglift 2.55 Saa 265 is perfectly completed by a **control system that is both visually and technically convincing**.

Standard colour:

RAL 7012

Options:

Wide range of extra pads, depending on vehicle type

Installation variants:


Superstructure on floor
Ceiling installation

Not included in the scope of approval, please order separately:

Steel cassette:

Standard: painted

Optional: hot-dip galvanized, plastic coated

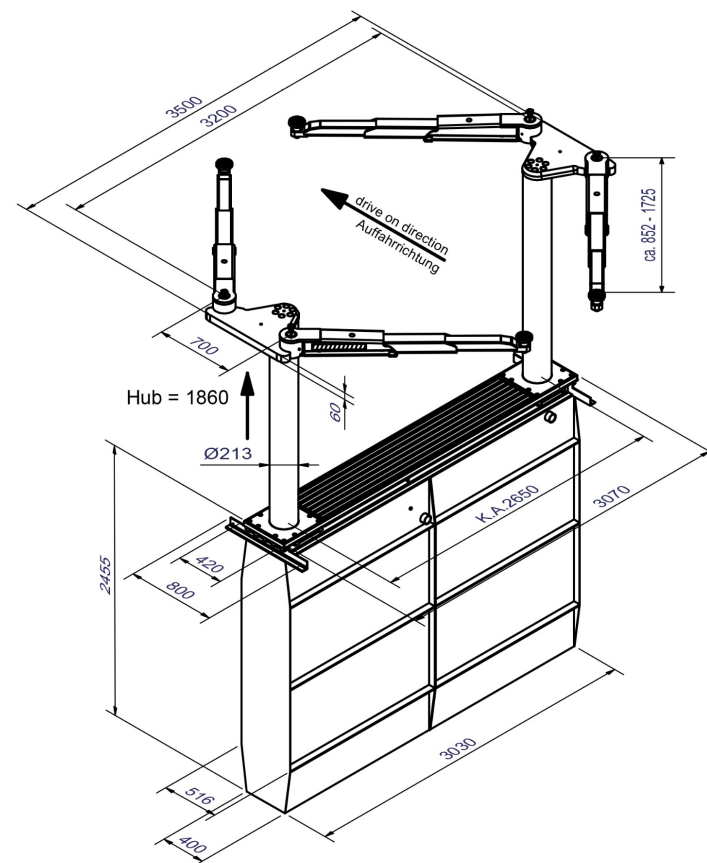



Technical drawing of the K&S 1245/1265 table, showing dimensions and labels. The drawing includes a top view and a side view. Key dimensions and labels are:

- Top view dimensions: 2200, 650, 900, 715-1410, 785, 625, 3900, 1188-1265, 1191-1225, 2104, 162, 2245, 1245, 2247, 2371.
- Side view dimensions: 1895, 800, 2464.
- Labels: "Ausfahrstellung" (extended position), "min. ca. 135", "max. ca. 195", "K&S 1245/1265".



Biglift 2.65 Saaa 230 VW

Electro-hydraulic twin-ram lift 6.5 t with swivel arm superstructure



VAS 782 049 | ASE78204980000:
20012135-1 & 20012135-2

Order no.	Item no.	#	Part of the approval according to order no. 20012135-1/-2:
20012135-1	21209	1	Swivel arm superstructure 2.65 Saaa 230, incl. 4 single telescopic lifting pads 16008, Ø50 mm
	12567	1	VW specification VAS 782049
	11103	1	Document holder
	11104	1	Set of 2 magnetic tool trays
	16010	4	Lifting pad extension 50 mm - Ø50 mm 1 pc.
20012135-2	10276	1	Hydraulic unit BL Sa 6,5 t, PD 2150, stroke 1860 mm
	11063	1	Set of cables 10 m
	12036	1	Ecological hydraulic fluid 17 ltr.

The triple telescopic swivel arms convince with an **unconventional lifting area**, especially suited for utility vehicles and large passenger cars.

The **internal arm locking system** installed as standard reliably protects against external influences.

The **strong 213 mm diameter cylinders** are also designed for long-lasting functionality and further round off high quality level which ensures **low maintenance requirements**.
Even in the event of a power blackout the lift can still be lowered without any problems thanks to the pneumatic emergency lowering system.

The Biglift 2.65 Saaa 230 is perfectly completed by a **control system that is both visually and technically convincing**.


Standard colour:
RAL 7012

Options:
Wide range of extra pads, depending on vehicle type

Installation variants:
Superstructure on floor
Ceiling installation

Not included in the scope of approval, please order separately:

Steel cassette:
Standard: painted
Optional: hot-dip galvanized, plastic coated

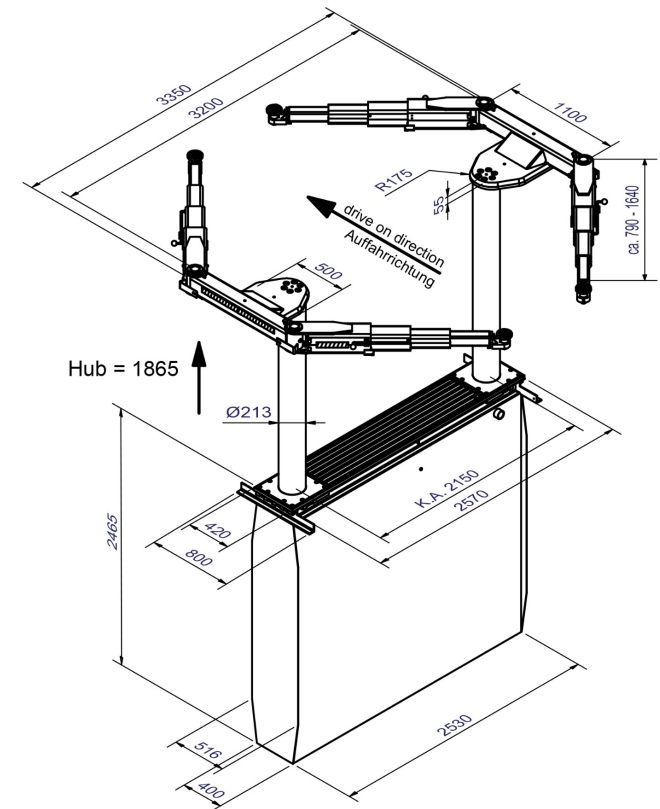



Biglift 2.65 Saaa 265 VW

Electro-hydraulic twin-ram lift 6.5 t with swivel arm superstructure



VAS 782 015A | ASE78201581000:
20012136-1 & 20012136-2

Order no.	Item no.	#	Part of the approval according to order no. 20012136-1/-2:
20012136-1	21210	1	Swivel arm superstructure 2.65 Saaa 265, incl. 4 single telescopic lifting pads 16008, Ø50 mm
	12568	1	VW specification VAS 782015A
	11103	1	Document holder
	11104	1	Set of 2 magnetic tool trays
	16010	4	Lifting pad extension 50 mm - Ø50 mm 1 pc.
20012136-2	10287	1	Hydraulic unit BL Sa 6,5 t 2650 mm
	11063	1	Set of cables 10 m
	12036	1	Ecological hydraulic fluid 17 ltr.

The triple telescopic swivel arms convince with an **unconventional lifting area**, especially suited for utility vehicles and large passenger cars.

The internal arm locking system installed as standard reliably protects against external influences. An integrated mechanical safety ratchet offers additional safety for all working procedures.

The **strong 213 mm diameter cylinders** are also designed for long-lasting functionality and further round off the high quality level which ensures **low maintenance requirements**.
Even in the event of a power blackout the lift can still be lowered without any problems thanks to the pneumatic emergency lowering system.

The Biglift 2.65 Saaa 230 is perfectly completed by a **control system that is both visually and technically convincing**.


Standard colour:
RAL 7012

Options:
Wide range of extra pads, depending on vehicle type

Installation variants:
Superstructure on floor
Ceiling installation

Not included in the scope of approval, please order separately:

Steel cassette:
Standard: painted
Optional: hot-dip galvanized, plastic coated

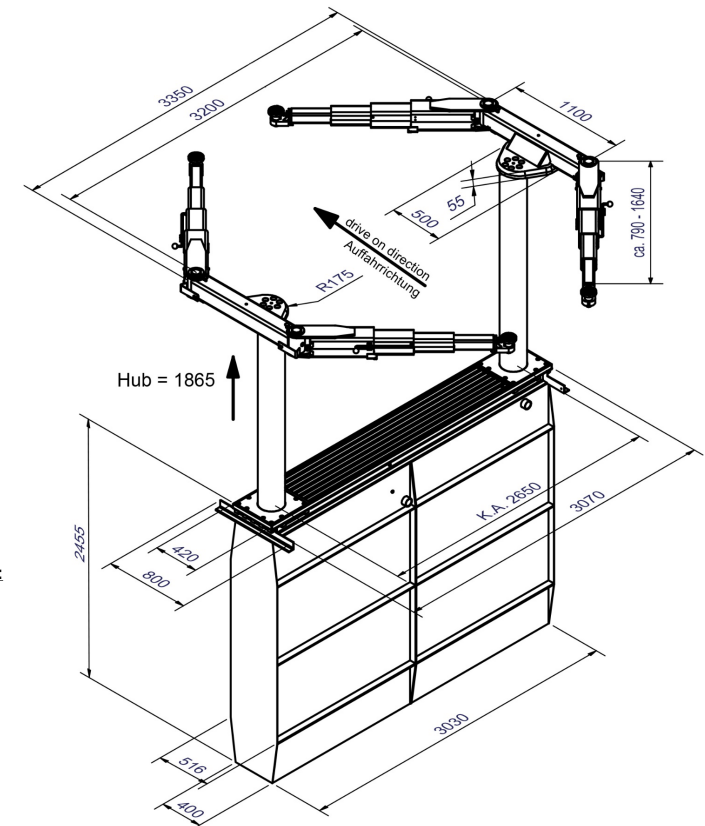



Biglift 2.65 F550 VW

Electro-hydraulic twin-ram lift 6,5 t, with platform



VAS 782 031 | ASE78203180000:
20012108-1 & 20012108-2

Order no.	Item no.	#	Part of the approval according to order no. 20012108-1/-2:
20012108-1	21507	1	Superstructure 2.65 F550 kpl.Zyl.Ø213
	12463	1	Surcharge VW RAL7012 VW-approval VAS and painting – F
	21100	1	Ramp, on floor 1100 L, MB 10° BL2.65/4.55 F480/550
	21084	1	Stops H=100
20012108-2	10291	1	Hydraulic unit BL2.65 - 1550-D-A-F
	12035	1	Ecological hydraulic fluid 17 ltr.

The **Biglift 2.65 F550** is a platform lift with an enormous **6.5-tonne** lifting capacity. Lifting **commercial vehicles of all kinds** is easy and uncomplicated with this platform lift.


The **strong cylinders** with a diameter of 213 mm are designed for long-lasting functionality and further round off the high level of quality that ensures **low maintenance costs**.
Even in the event of a power failure, the lift can be easily lowered thanks to the pneumatic emergency lowering device.

The Biglift 2.65 F550 is perfectly completed by a **control system that is both visually and technically convincing..**

Standar colour:
RAL 7012

Installation variants:
Superstructure on floor
Recessed installation

Not included in the scope of approval, please order separately:
Steel cassette:
Standard: painted
Optional: hot-dip galvanized, plastic coated

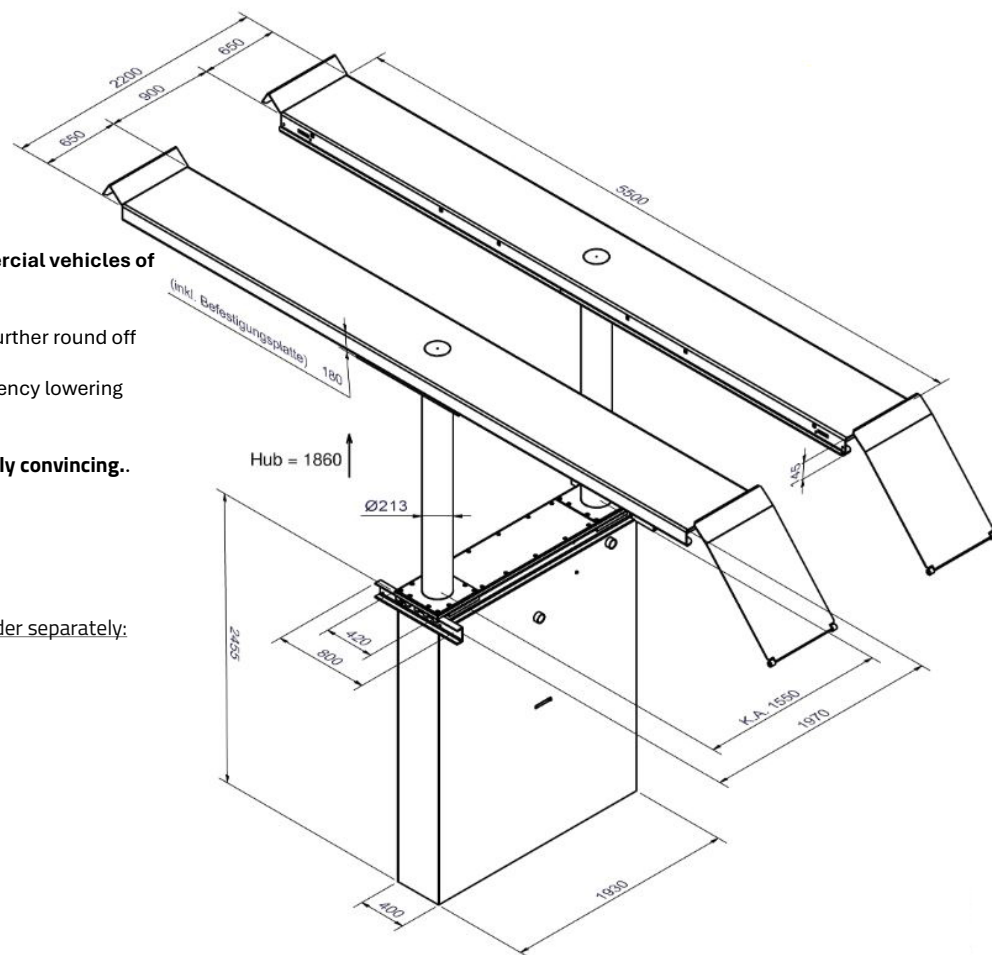



Sharklift 4.55 F550 VW

Elektro-hydraulische 4-Rampe-Lift, 5,5 t, mit Plattformen



VAS 783 011 | ASE78300780000:
20012112-1 & 20012112-2

Order no.	Item no.	#	Part of the approval according to order no. 20012112-1/-2:
20012112-1	21113	1	Superstructure SH 4.55 F550 AME KA1550/3000
	12942	1	LED lighting for vehicle bottom
	20551	1	Sliding plates Premium (VW)
	21078	1	Stops 4.65/4.55 F480 / F550 AME
	12463	1	Surcharge VW RAL7012 VW-approval VAS and painting – F
20012112-2	10299	1	Hydraulic unit SH4.55-1550-D-A-X
	11073	1	Set of cables
	12040	1	Ecological hydraulic fluid 20 ltr.

The Sharklift 4.55 F 550 is ideal for **convenient and quick wheel alignment**. The platforms are made of very strong and rigid material, which ensures a **high degree of stability**. They are zinc coated and painted. This not only looks good, it also works well!

The Sharklift 4.55 F 550 also impresses with its enormous precision! Four strong cylinders with a diameter of 140 mm and **4 mechanical catches** are designed for maximum precision and long-lasting functionality, further enhancing the high-quality level that ensures **low maintenance requirements**.

The Sharklift 4.55 F 550 is perfectly completed by a **control system that is both visually and technically convincing**.


Standard colour
RAL 7012

Options:
LED-lighting set
Scissor jack

Installation variants:
Superstructure on floor
Recessed installation

Not included in the scope of approval, please order separately:

Steel cassette:
Standard: painted
Optional: hot-dip galvanized or plastic coated

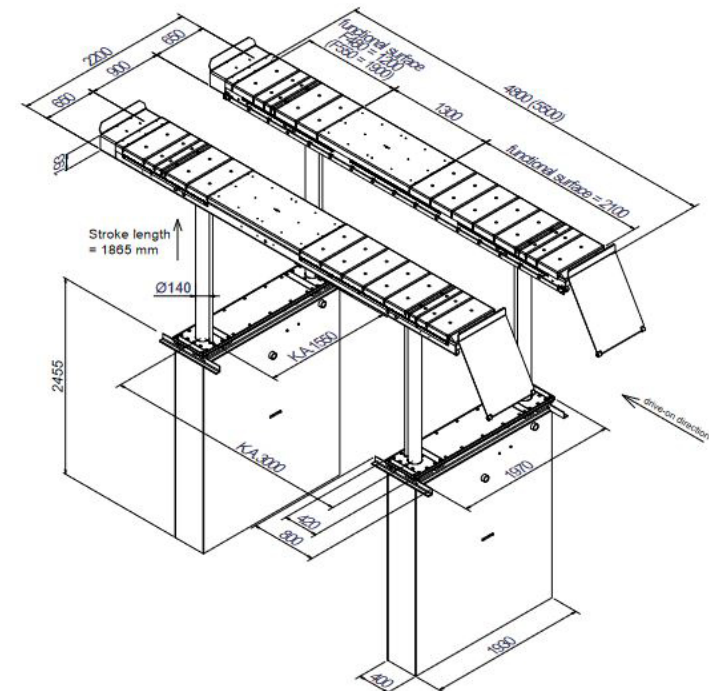



Sharklift 4.65 F550 VW

Electro-hydraulic 4-ram lift, 6.5 t with platforms



VAS 783 007 | ASE78300780000:
20012110-1 & 20012110-2

Order no.	Item no.	#	Part of the approval according to order no. 20012110-1/-2:
20012110-1	21072	1	Superstructure QL 4.65 F550 AME KA1550/3000
	12942	1	LED-lighting for vehicle bottom
	20551	1	Sliding plates Premium (VW)
	21078	1	Stops 4.65/4.55 F480 / F550 AME
	12463	1	Surcharge VW RAL7012 VW-approval VAS and painting – F
20012110-2	10293	1	Hydraulic unit SHL4.65-1550-D-A-X
	11073	1	Set of cables
	12042	1	Ecological hydraulic fluid 24 ltr.

The Sharklift 4.65 F 550 is ideal for **convenient and quick wheel alignment**. The platforms are made of very strong and rigid material, which ensures a **high degree of stability**.

The Sharklift 4.65 F 550 also impresses with its enormous precision! Four strong cylinders with a diameter of 213 mm and **4 mechanical catches** are designed for maximum precision and long-lasting functionality, further enhancing the high-quality level that ensures **low maintenance requirements**.

The Sharklift 4.65 F 550 is perfectly completed by a **control system that is both visually and technically convincing**.


Standard colour:
RAL 7012

Options:
LED-lighting kit
Scissor jack

Installation variants:
Superstructure on floor
Recessed installation

Not included in the scope of approval, please order separately:

Steel cassette:
Standard: painted
Optional: hot-dip galvanized or plastic coated

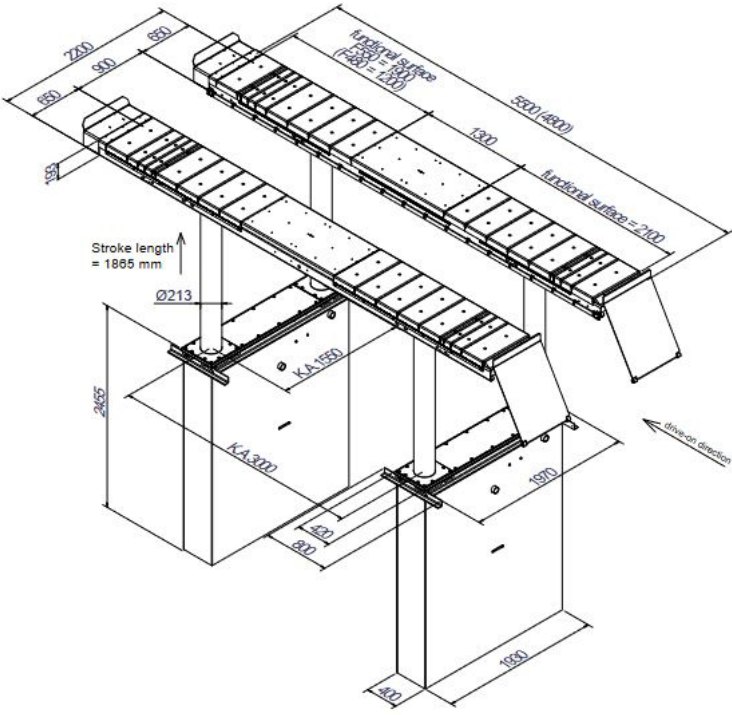

Sharklift 4.65 F550 – VAS 782 007 | ASE78300780000



Maestro 35 F VW

Electro-mechanical 2-post lift 3.5 t



Order no.	Item no.	#	Part of the approval according to order no. 20012137:
20012137	89501	1	Maestro 35 F - DT/ST, 400/3/50 - 4350/5050 mm - Ø40
	776526	1	Portal set for Maestro 2.30/2.32/2.35/30/32/35, 4350 mm

The 2-post lifts of the Maestro 35 series impress with their premium construction.

They come with **extremely stable and welded columns**.



Smooth running behaviour is ensured by the **roller-bearing carriage**.

The **cold-rolled spindle** guarantees a **particularly long service life**.

The columns are asymmetrically positioned, i. e. vehicles can be positioned far to the rear, which ensures an **optimal door opening angle**.

Of course, the Maestro 35 also has a door stop protection to prevent damage during entry and exit.

The **swivel arms are extremely flat** and thus ensure a low minimum height. The **internal arm locking system** with strong 360° interlocking protects against moisture and dirt.

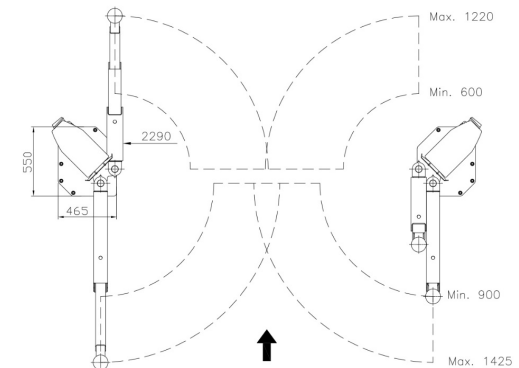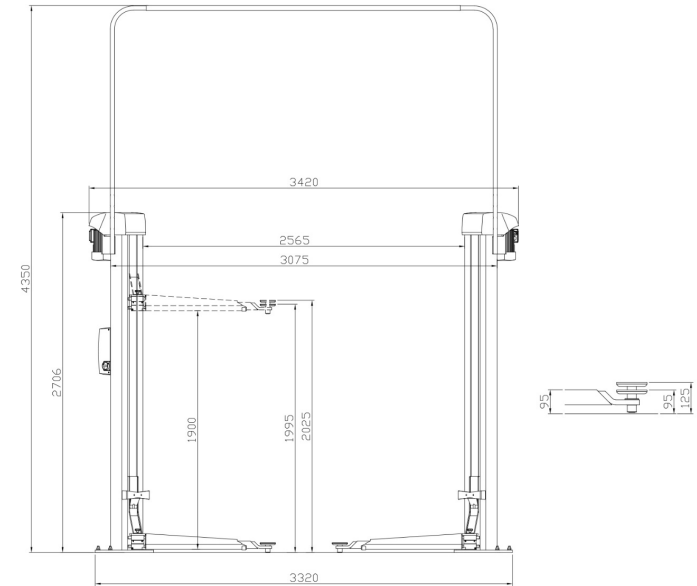

Standard colour:

Arms: RAL 7040

Posts: RAL 7012

Variants:

Available for different voltages

F = flex pad

Optional extras:

Available with different portal heights

LED lighting set

Energy set with compressed air and socket-outlet

Extra control unit for second column

Large program of extra pads, depending on type of vehicle



Maestro 2.35 NxT F VW

Electro-mechanical 2-post lift 3.5 t



Order no.	Item no.	#	Part of the approval according to order no. 20012138:
20012138	98470	1	Maestro 2.35 NxT F DT/ST 400/3/50 – 4350/5050mm- Ø50 pick-up, with 4 double telescopic lifting pads 16007
	777958	1	Portal set (3990-4350 mm)
	777907	1	Power pack for Maestro, 1 x Schuko plug (230 V), 1 x compressed air quick coupling 1/4"
	11104	1	Set of 2 magnetic tool trays

The 2-post lifts of the Maestro 2.35 NxT series impress with their premium construction.

They come with **extremely stable and welded columns**.


Smooth running behaviour is ensured by the **roller-bearing carriage**.

The **cold-rolled spindle** guarantees a **particularly long service life**.

The columns are asymmetrically positioned, i. e. vehicles can be positioned far to the rear, which ensures an **optimal door opening angle**.

Of course, the Maestro 35 also has a door stop protection to prevent damage during entry and exit.

The **swivel arms are extremely flat** and thus ensure a low minimum height. The **internal arm locking system** with strong 360° interlocking protects against moisture and dirt.

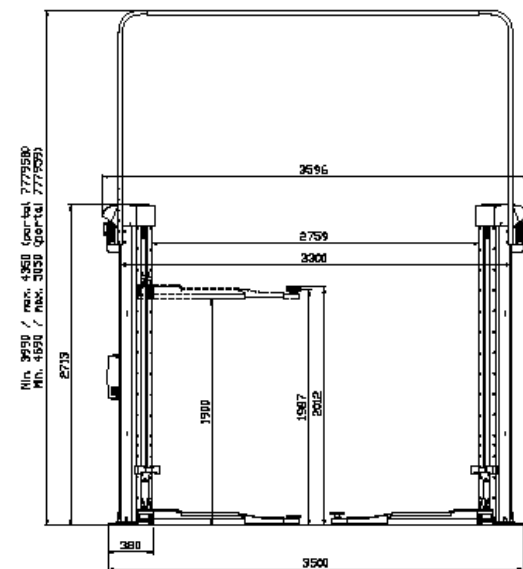

Standard colour:

Arms: RAL 7040

Posts: RAL 7012

Variants:

Available for different voltages

F = flex pad

Optional extras:




Available with different portal heights

LED lighting set

Extra control unit for second column

Wheel support devices

Large program of extra pads, depending on type of vehicle

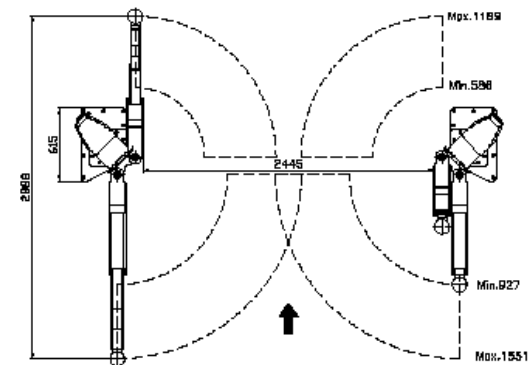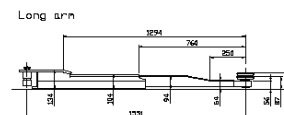



Maestro 2.60 NxT F VW

Electro-mechanical 2-post lift 6.0 t



Order no.	Item no.	#	Part of the approval according to order no. 20012139:
20012139	004794	1	Maestro 2.60 NxT F DT/DT 400/3/50 incl. portal set - 5245mm- Ø50 pick-up, with 4 single telescopic lifting pads 16008
	777907	1	Power pack for Maestro, 1 x Schuko plug (230 V), 1 x compressed air quick coupling 1/4"
	11104	1	Set of 2 magnetic tool trays

The 2-post lifts of the Maestro 2.60 NxT series impress with their premium construction.

They come with **extremely stable and welded columns**.

Smooth running behaviour is ensured by the **roller-bearing carriage**. The **cold-rolled spindle** guarantees a **particularly long service life**.

The welded and symmetrically positioned columns are ideal for **the safe lifting of large and heavy vehicles up to a maximum of 6 tonnes**, even with difficult lifting points.

The universal lifting range allows all vehicles to be lifted safely, from small cars to long-wheelbase vans.

Thanks to the **flat swivel arm design** and the newly designed base plate, even lifting low vehicles is a simple matter, as the swivel arms reach the ground.

Standard colour:

Arms: RAL 7040

Posts: RAL 7012

Optional extras:

LED lighting set

Extra control unit for second column




Door stop protection

Large program of extra pads, depending on type of vehicle

Variants:

Available for different voltages

F = flex pad

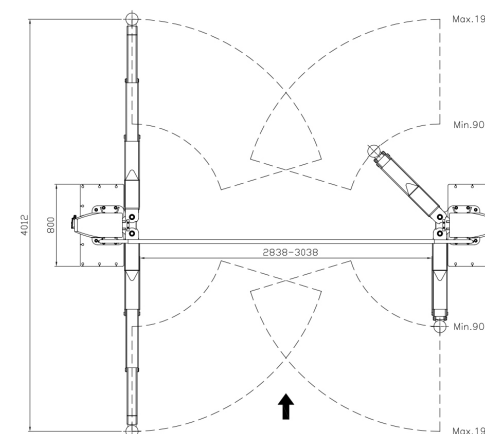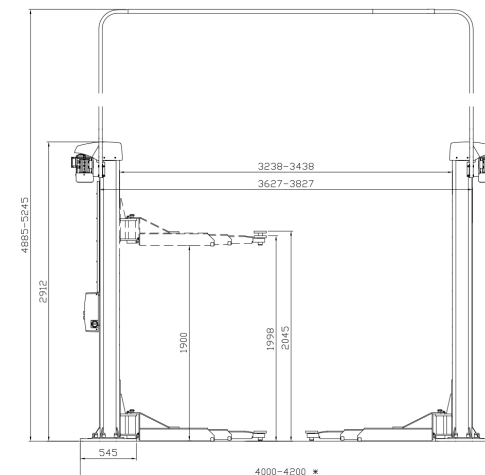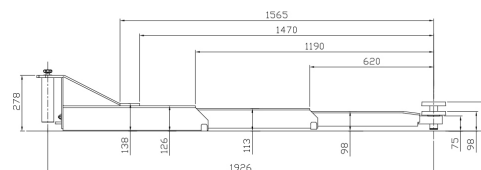



Major 4030-44 WL DLX VW

Electro-hydraulic 4-post lift with 4 t capacity



Order no.	Item no.	#	Part of the approval according to order no. 20012115:
20012115	931835	1	Major 4030-44 WL DLX, 400/3/50
	756579	1	Set of two drive-on ramps for Major 4030-44 WL-A, 1200 mm
	756580	1	Set of two stops for Major 4030-44 WL DLX
	755069	1	Set of expansion bolts, 16 x HSL - 3 M 10/40 (L=130)
	758953	1	LED- lighting set for Major 4030-44 WL
	S1839	1	Sliding plate Premium Major 4030

The 4-post wheel alignment lift Major 4030-44 WL DLX impresses with **optimum drivability**, from small cars to smaller commercial vehicles.

This lift automatically settles in a finely adjusted catch bar that ensures **optimal platform position for successful measurement**.


With a platform length of 4400 mm and a load capacity of 4.0 tonnes, it is the ideal measurement solution for cars in the surface-mounted area.

Standard colour:

Platforms: RAL 7040
Posts: RAL 7012

Options:

LED-Lighting set
2nd control unit
Set of 2 cover plates

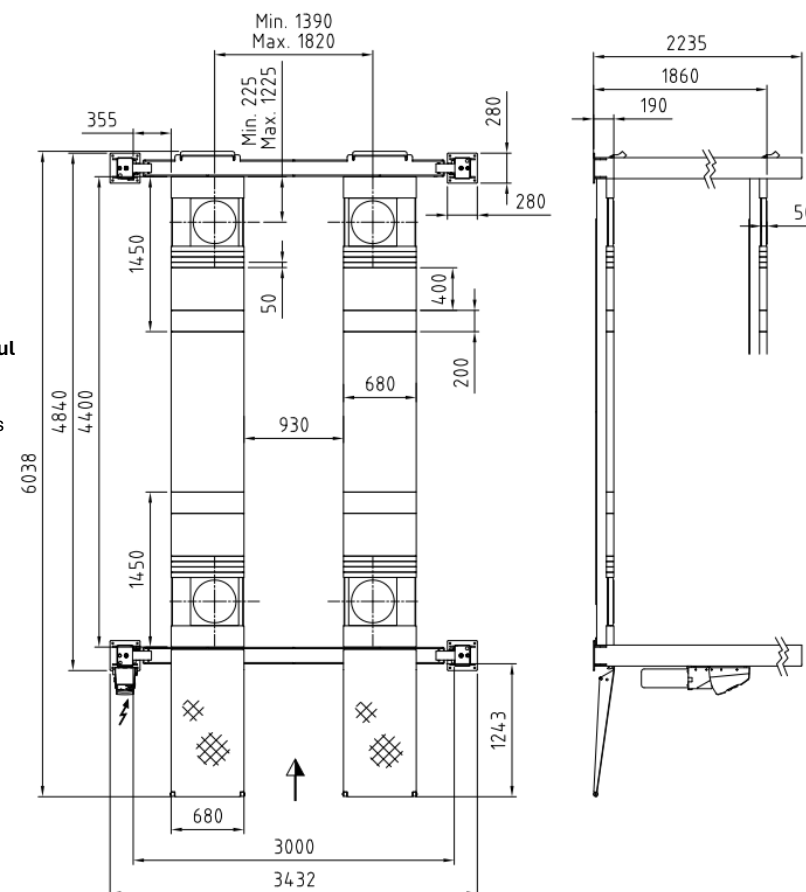




MagiX 35 DS II

Electro-hydraulic double scissor lift, 3.5 t capacity



VAS 791 031 | ASE79103180000
200012140

Order no.	Item no.	#	Part of the approval according to order no. 20012140:
20012140	002543	1	MagiX 35 DS II short 3,5T 230-400/3/50-60 VAS 791031 galv.

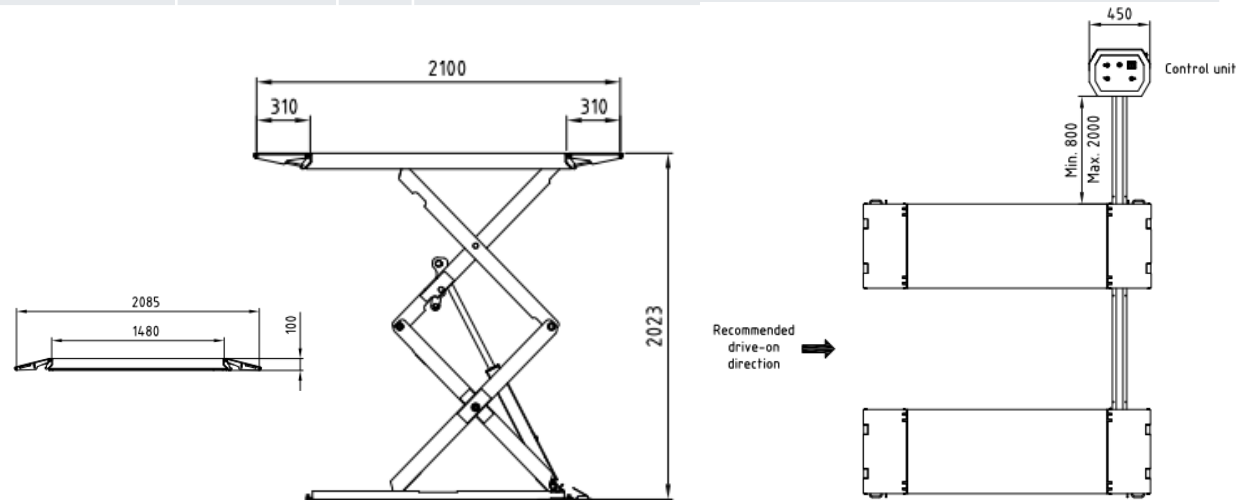

The MagiX 35 DS II double-scissor lift impresses with an **optimum lifting range** from small cars to a short wheelbase VW T6/SUVs. Thanks to the **low installation height of only ≤ 100 mm**, flat vehicles can also be driven over without any problems. We achieve full lifting capacity from a low lifting height. The MagiX 35 DS II comes with a **comfortable working height of over 2 metres**, which is important for workplace ergonomics. There is no specified drive-on direction for the MagiX 35 DS II, i.e. it can be driven on from both sides and the operating column can be positioned flexibly. It also works **without compressed air and safety catch**. The MagiX 35 DS II scores with lubrication-free Teflon plain bearings in all joints and a stable scissor construction that ensures high lateral stability. Synchronisation is monitored electronically.

Standard Colour:

Platform & scissor: RAL 7012
Ramps: RAL 7012

Variants:

F = hot-dip galvanised platforms

Options:

Set of expansion bolts
LED-lighting for surface-mounted installation
Installation frame galvanized, for recessed installation
Rubber blocks in different heights
Hose extension incl. Covers (+1m)
Additional long drive-over ramps for lowered cars
Installation on floor or recessed with the same lift

