

Sololift 1.35 Fv Uni VW

Electro-hydraulic centre-ram lift 3.5 t, superstructure with lifting blades





Order no.	Item no.	#	Part of the approval according to order no. 20012119-1/-2:
20012119-1	21514	1	Superstructure 1.35 Fv Uni Ø213
20012119-2	10305	1	Hydraulic unit S1.35Ø213-1910-D-A-wall aggregate
	12034	1	Ecological hydraulic fluid 14 ltr.

The Sololift 1.35 Fv Uni impresses with easy handling when lifting vehicles. Various wheelbases can be lifted with the adjustable steel blades located on the sides of the superstructure. This leaves the underbody sills free, unlike with a platform lift.

The strong cylinder with a diameter of 213 mm is also designed for long-lasting functionality and further rounds off the high-quality level, which ensures low maintenance requirements.

Even in the event of a power failure, the lift can be lowered without difficulty thanks to the pneumatic emergency lowering device.

Sololift 1.35 Fv Uni is perfectly completed by a control system that is both visually and technically convincing

Standard colour:


galvanized

Installation variants:

Superstructure on floor with hydraulic pump unit in floor Not included in the scope of approval, please order separately: Steel cassette:

Self supporting Standard: painted

Optional: hot-dip galvanized or plastic-coated

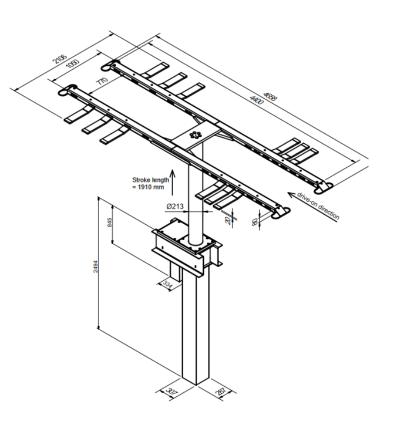

Volkswagen

Freigabe Nr. VAS 781 009