



PSCA 40C T E
PSCA 36C T E

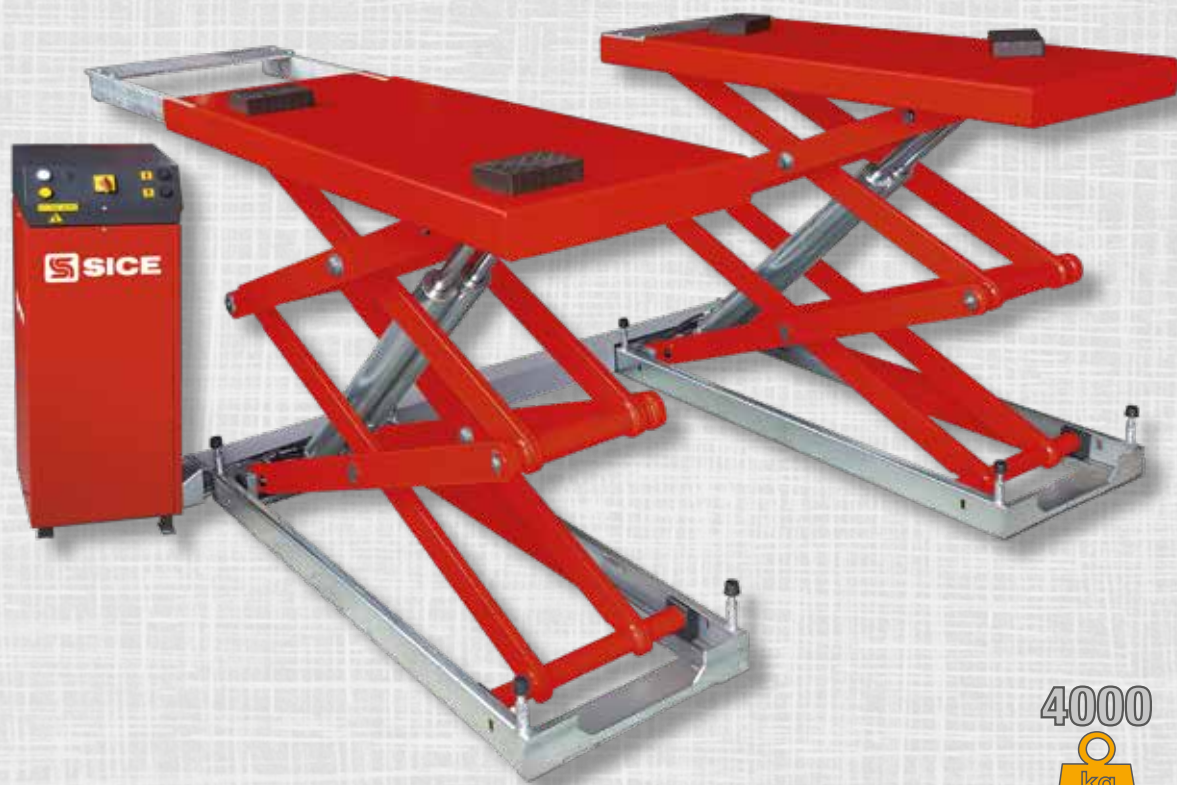

C-LINE


Lifting equipment

EN → Electrohydraulic underbody scissors type lift, for tyre specialists, car workshops, and body repairers



Electrohydraulic underbody scissors type lift, for tyre specialists, car workshops, and body repairers.
Runboards alignment by **MASTER/SLAVE system**.
Runboard available with extensions only.
Configuration for flush installation.

- 1 **Strong support** of cylinder and **removable connections on base and runway** for simpler maintenance.
- 2 **Adjustment bolts** with rubber to cushion the end of the stroke.
- 3 Generously sized, **self-lubricating sliding blocks**.
- 4 Runway with **pull-out extension**.



EN → Supplied accessories

All models complete with:

- ✓ Self-lubricating bushings on all rotating parts
- ✓ Set of 4 rubber pads


EN → Optional accessories

- Pair of cross pieces and pads for off-road vehicles
- Kit for pit installations

EN → Technical Data

Model	PSCA 40C T E	PSCA 36C T E
Lift capacity	4000 kg	3600 kg
Lifting time	45 s	
Three phase motor	400/230V - 3kW - 3Ph - 50/60Hz	
Single phase motor	230V - 3kW - 1Ph - 50/60Hz	
Max. lifting height	2010 mm	
Lift min. height	290 mm	270 mm

EN → Overall Dimensions

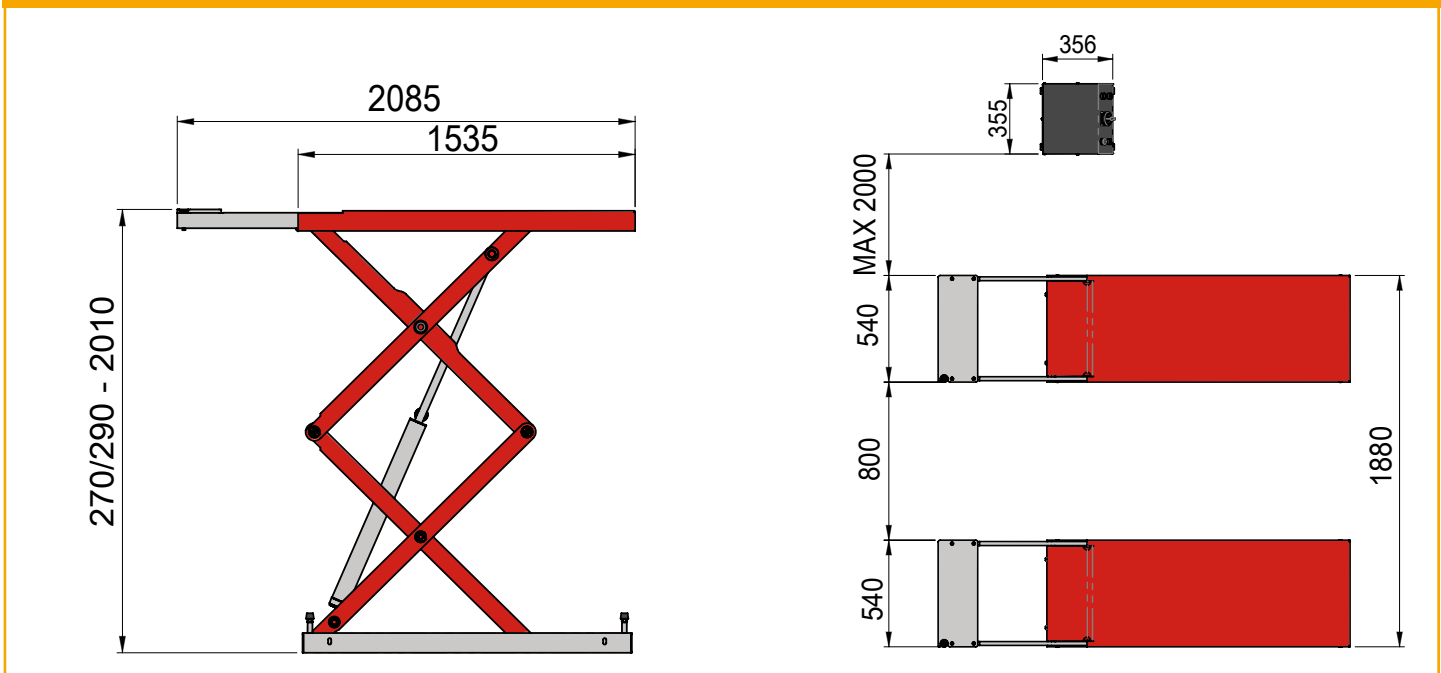

The manufacturer reserves the right to modify the features of its products at any time.

Cod. DPSC000455A - 01/2023



NEXION SPA - ITALY
www.sice.it - sice@sice.it

Designed in
ITALY

