


# PSR 55C

# PSR 45C



## C-LINE

### Lifting equipment



- EN** → Electrohydraulic underwheel scissors type lift for total wheel alignment “**CT**” with:  
- rear oscillating platforms and recesses for front turntables.

Auxiliary wheel release lift “**LT**”.

Versions available:

**PRS 55C - PRS 55C CT - PRS 55C CT LT**

**PRS 45C - PRS 45C CT - PRS 45C CT LT**



- **Lift table with double lifting cylinder and double extensions**, in front and rear, which is very flexible, no movement of vehicle on the lift needed.



- **Adjustable recess for the turntable**.



- **Adjustable mechanical safety device**, also for exact adjustment for wheel alignment.



- **Double lifting lever** to ensure a constant parallel lift movement.




- The wheel alignment versions have the possibility of **adjust the lift**.



# PSR 55C

# PSR 45C

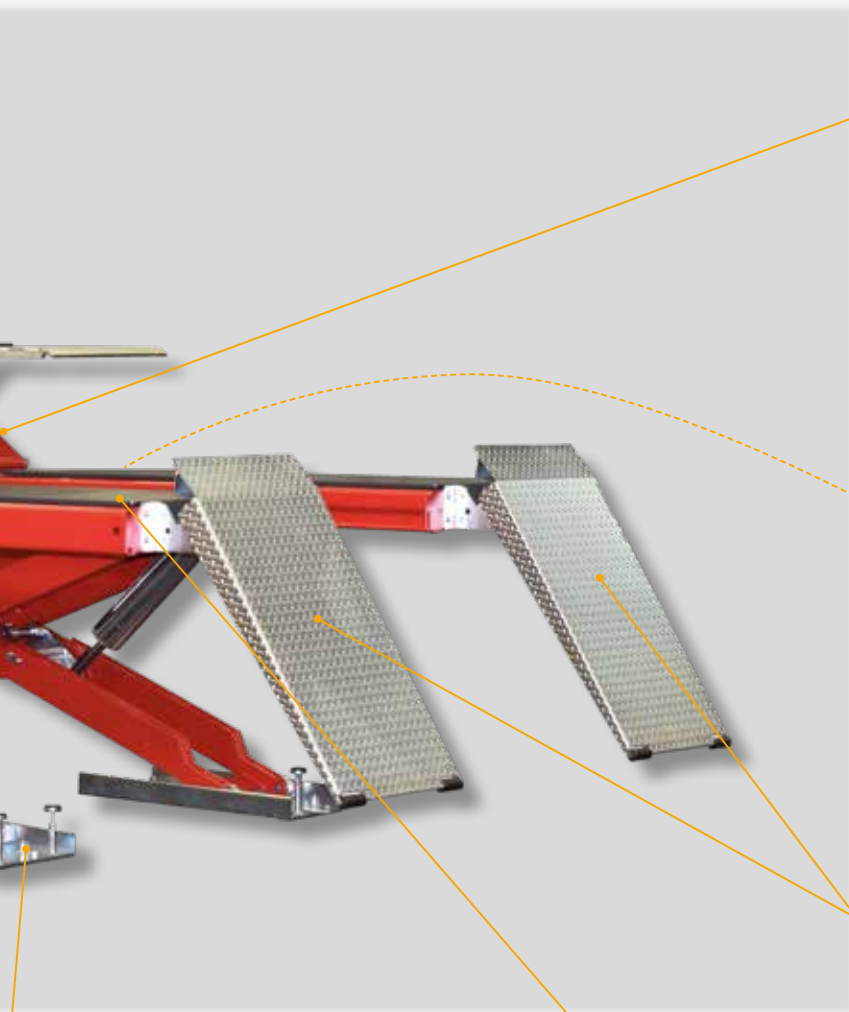

• **Lift table with double lifting cylinder** to ensure a constant parallel lift movement.



• Control unit with few **essential keys** and **clear and intuitive functional icons**.



• **Easy drive on** with short and sturdy ramps due to very low height..



Some of the range already include  
base frame.



• **Sliding plates** with air central locking.

**EN** → **Technical data - PSR55C - PSR 55C CT - PSR 55C CT LT**

Main lift capacity	"LT" capacity	Lifting time	Motor	Main lift max. lifting height	"LT" max. lifting height	Lift minimum height	Runboard length
5500 kg	4000 kg	45 s	400/230V - 3kW 3Ph - 50/60Hz	2010/2030/2090 mm	411 mm	165/185/240 mm	4608/5208 mm

**EN** → **Technical data - PSR45C - PSR 45C CT - PSR 45C CT LT**

Main lift capacity	"LT" capacity	Lifting time	Motor	Main lift max. lifting height	"LT" max. lifting height	Lift minimum height	Runboard length
4500 kg	4000 kg	45 s	400/230V - 3kW 3Ph - 50/60Hz	2010/2030/2090 mm	411 mm	165/185/240 mm	4208 mm

**EN** → **Supplied accessories**


All models supplied with: ✓ Automatic runway levelling system with master/slave hydraulic circuit. ✓ Self-lubricating bushings on all rotating parts. ✓ Set of 4 rubber pads.

**EN** → **Optional accessories**


- Pair of cross pieces and pads for off-road vehicles.
- Kit for flush installations.

**EN** → **Dimensions**


**PSR 55C - PSR 45C**

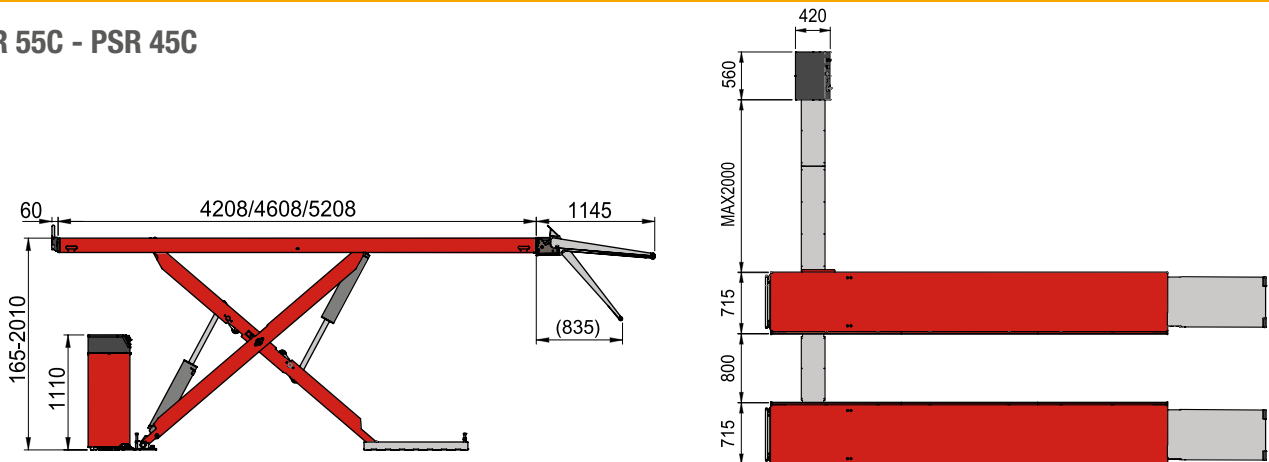

**PSR 55C CT - PSR 45C CT**

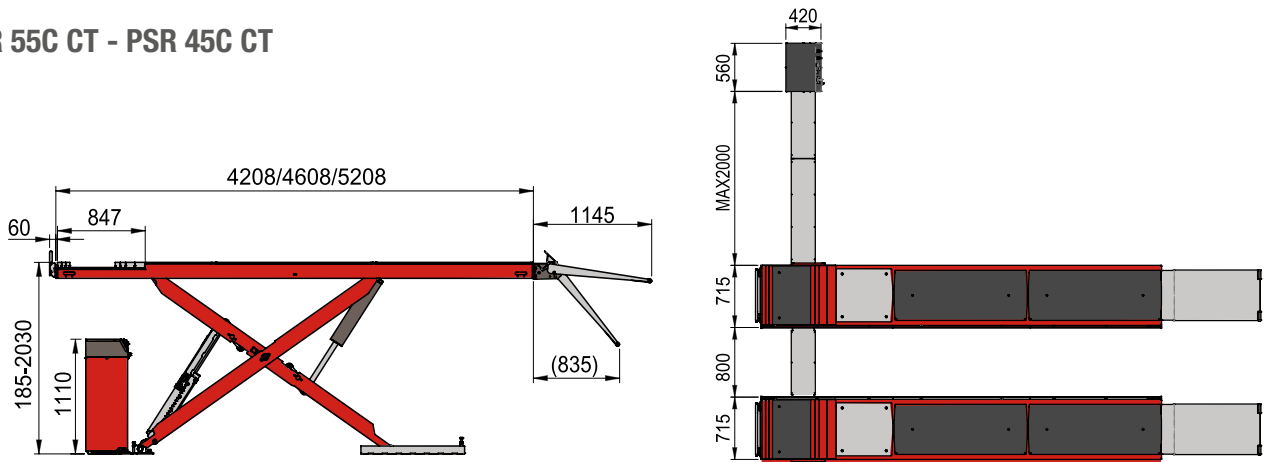

**PSR 55C CT LT - PSR 45C CT LT**

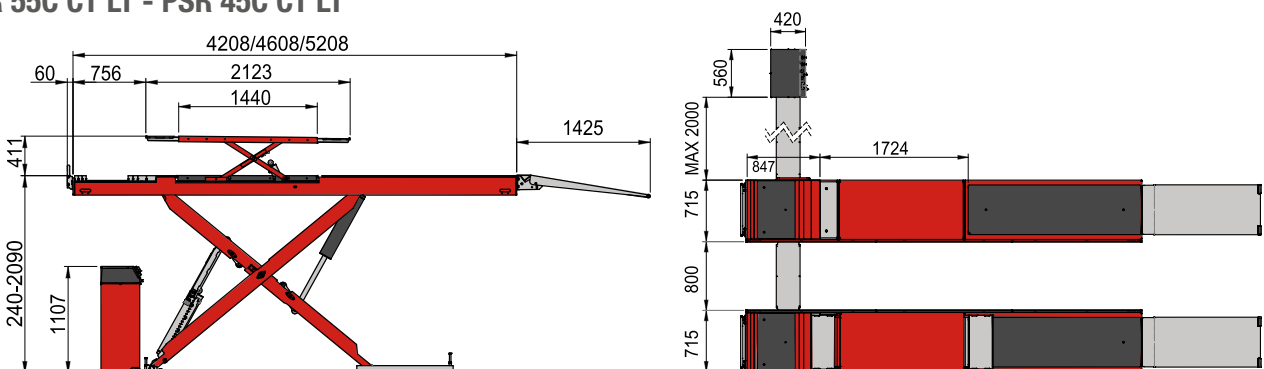

The manufacturer reserves the right to modify the features of its products at any time.